




SUITE 1100



▲ SB/FS: SU1.101

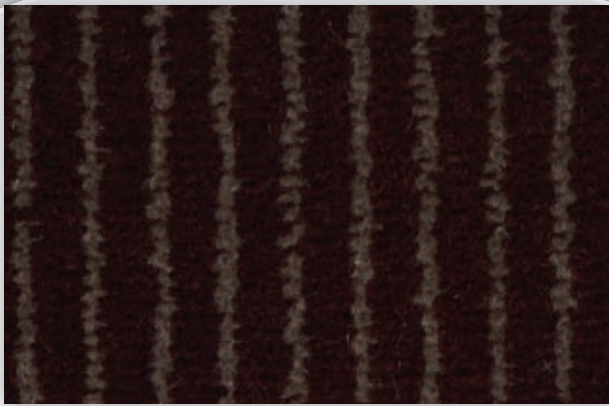

▲ SB/FS: SU1.211



▲ SB/FS: SU1.241



▲ SB/FS: SU1.261



▲ SB/FS: SU1.271



▲ SB/FS: SU1.801

SUITE 1100

lano carpets for contract

LANO


Flooring Solutions!

Technical data for Suite ± 1100 g/sqm, other technical data on demand.

Fabricagemethode Technique de fabrication Manufacturing process Herstellungstyp Tecnica di fabbricazione tufted, 1/8" cross over	Poolsamenstelling Nature du velours Pile composition Polmaterial Composizione felpa 80% WO 20% PA	Tuftdoek Premier dossier Primary backing Trägermaterial Tela di supporto woven	Rugtype Envers Secondary backing Rücken Sottofondo SB/FS
Totale dikte Hauteur totale Total height Gesamthöhe Spessore totale ± 11,0 mm	Nuttige poolhoogte Hauteur de velours utile Effective pile height Tatsächliche Florhöhe Spessore felpa ± 8,0 mm	Breedte Largeur Width Breite Altezza ± 400 cm	Aantal noppen/m ² Nombre de points/m ² Number of knots/sqm Noppenzahl/m ² Numero di punti/mq ± 113400
Poolinzetgewicht/m ² Poids mis en oeuvre/m ² Pile weight/sqm Poleinsatzgewicht/m ² Peso felpa/mq ± 1100 gr	Totaal gewicht/m ² Poids total/m ² Total weight/sqm Poleinsatzgewicht/m ² Peso totale/mq ± 2400 gr	EN 13501-1 Brandgedrag Comportement au feu Fire behaviour Brennverhalten Reazione al fuoco C_{fi}-s1	EN 1307-2004 Classificatie Classification Classification Klassifizierung Classificazione Class 23 Domestic Heavy Class 32 Commercial General
ISO 140/8 1997 Contactgeluidisolatie Isolation aux bruits d'impact Impact sound insulation Trittschallverbesserungsmaß Miglioramento acustico ± 27 dB	ISO 354 Geluidsdempingsvermogen α_s Absorption phonique α_s Sound absorption α_s Schallabsorptionsgrad α_s Grado d'assorbimento acustico α_s ± 0,39 1000 Hz	ISO 11654 Geluidsdempingsvermogen α_w Absorption phonique α_w Sound absorption α_w Schallabsorptionsgrad α_w Grado d'assorbimento acustico α_w ± 0,25	DIN 52612 Warmtedoorlaatweerstand Résistivité thermique Thermal retention Wärmedurchlaßwiderstand Resistenza termica ± 0,098 m²/kW
TOG rating ± 0,98	ISO 105 B02 2000 Lichtechtheid Solidité à la lumière Lightfastness Lichtechtheid Solidità colori alla luce ≥ 5	ISO 105 E01 2002 Waterechtheid verkleuring Solidité à l'eau changement couleur Waterfastness change in colour Wasserechtheit Änderung der Farbe Solidità colori all'acqua cambio colore ≥ 4	ISO 105 E01 2002 Waterechtheid uitbloeding Solidité à l'eau dégorgeement Waterfastness staining Wasserechtheit anbluten Solidità colori all'acqua sfumatura colore ≥ 4
ISO 105 X12 2001 Wrijftechtheid droog Solidité au frottement sec Rubbingfastness dry Reibungechtheit trocken Solidità colori allo sfregamento a secco ≥ 4	ISO 105 X12 2001 Wrijftechtheid nat Solidité au frottement humide Rubbingfastness wet Reibungechtheit nass Solidità colori allo sfregamento umido ≥ 4	Ce produit s'inscrit dans la démarche HQE (F.D.E.S. selon la norme NF P01-10 disponible sur demande). F.D.E.S. = fiche de données environnementales et sanitaires. HQE	

(±) These details are approximate. Complete specification details and associated certificates together with tolerances applying to the above can be provided upon request. We reserve the right to improve technical specifications without prior notice. Due to method of manufacture perfect pattern and/or colour matching cannot be guaranteed. In cut-pile carpeting, in rare cases, shading/pile reversal may occur without affecting its fitness for use. Shading/pile reversal can not be considered as a manufacturing or a material defect and will not affect the durability of the carpet.

For other languages see: www.lano.com

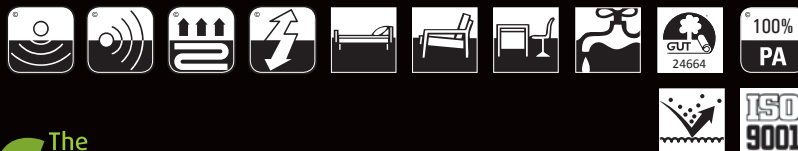

Lano
Zuidstraat 44
8530 Harelbeke-Belgium
t +32-56-65 40 00
f +32-56-65 40 09
marketing@lano.be
www.lano.com

The
Green
signature
of Lano Carpets



HQE
REACH
The new EU chemicals legislation